

Butler

Kendo.30S

**KENDO
30S**

TYRE CHANGERS

免撬棍全自动拆胎机

**AUTOMATIC TYRE CHANGERS
WITHOUT MOUNTING LEVER**

简单操作可同时定位压轮和鸟头

The bead breaker rollers and tool are simultaneously positioned in one simple movement.

拆装胎过程中辅助臂可自动锁住特定位置，确保更高的精确度。

To ensure greater precision, the arms automatically lock in place during mounting and demounting.



**BUTLER
PATENT**


有效夹紧装置

旋转过程中夹紧压力会自动增加

EXTRA-GRIP CLAMPING DEVICE.
Gripping pressure is automatically increased during rotation.



**BUTLER
PATENT**

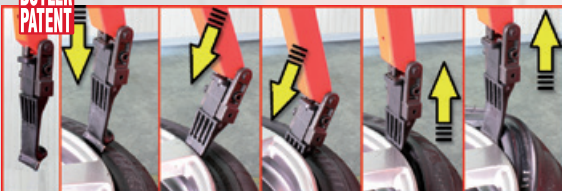

鸟头由防刮伤材料制成，分离胎圈时不会损坏轮毂，也无需借助撬棍

Tool in scratch-proof material, it removes the bead without damaging the rim and without using levers.



传感器自动启动径向穿透运动，极大简化拆胎操作

压轮由塑料材质制成，即使与轮辋触碰也不会产生损伤

The proximity sensors automatically activate the radial penetration movement, simplifying bead breaking. Made from plastic material, the rollers do not damage the rim even if contact occurs.

**BUTLER
PATENT**



INVE MOTOR


速度可完全根据操作人员的需要进行设定。带调速器的变频器可保护轮胎

Speed set by the operator, exactly as required. Inverter with governor to protect the tyre.

可扩大至30"
UNIT EXPANDS UP TO 30"



标准配件 STANDARD



G1000A140
压胎棒
Bead pusher with pulling system



G1000A84K
锥形防护套
Cone guard



G1000A81K (10 x kit)
转台保护垫
Turntable guard



机械夹
Mechanical clamping




压力计
Pressure gauge



延长和防护套
Extension and guard



定中心适配
Centering adaptor

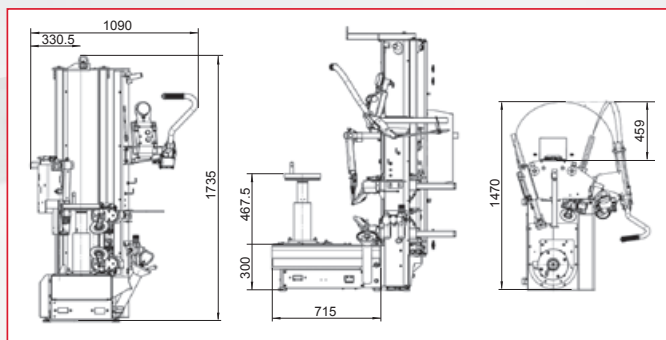

可选配件 OPTIONS



G1000A99NP
轮胎举升器
Wheel lift.



G1000A138
快夹装置
Quick-fit rim clamping device.



PLUS 91AKC
气动压胎器
Pneumatic bead depressor.



G1000A137
用于中心封闭轮胎的通用法兰，也适用反向轮辋
Universal flange for closed centre rims. Suitable also for reverse rims.

| 技术参数 | TECHNICAL DATA | |
|-----------|---------------------------|-----------------------------|
| 适用轮胎 | Handled wheels from | 10"-30" |
| 重量 | Weight | 330 kg (338 kg-FI) |
| 电压 | Voltage | 1ph, 200/265v, 50/60Hz |
| 最大轮胎宽度 | Max wheel width | 15" |
| 最大轮胎直径 | Max wheel diam. | 1143 mm (45") |
| 撬胎功率 (单臂) | Bead break.pow.(each arm) | 12000 N |
| 最大扭矩 | Max torque | 120 Kgm |
| 大铲操作 | Bead breaker movement | automatic |
| 旋转电机 | Rotation Motor | 1,5Kw inver.+ 0,75 Kw motor |
| 建议气压 | Recommended air supply | 8 -10 bar |

KENDO.30S FI

强大的真空胎充气系统适用于任何轮辋直径。包括一个安全装置保护操作人员

Powerful tubeless tyre inflation system suitable for any rim diameter. Includes a safety device to protect the operator.



Butler

Engineering and Marketing S.p.A. a.s.u.
Via dell'Ecologia 6 - 42047 Rolo (RE)
Ph. +39-0522-647911 - Fax +39-0522-649760
www.butler.it - info@butler.it

A DOVER COMPANY

Technical data and composition presented in this catalogue may vary. Pictures reproduced are only indicative.